


VACUUM BOOSTER

The Vacuum Booster allows utilization of the Fuji Ring Compressor in a zero-flow, or “dead-head” condition for material handling, vacuum pick-up, and other industrial hold-down applications. The vacuum booster permits the necessary flow of cooling air through the blower. Please specify blower model.

Contact the Fuji applications engineering department for assistance in sizing.

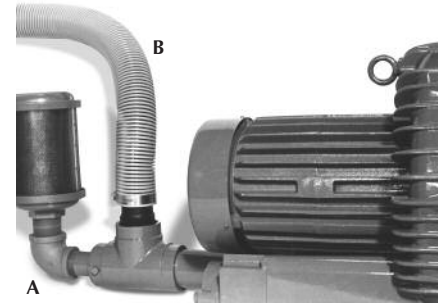

(A) Cooling air flow; (B) Main suction line (may be dead-headed)

VACUUM BOOSTER	
Model No.	For Use With Blower Model:
VB45	VFC40-VFC50
VB67	VFC60-VFC70